

产品规格书

Product Specification

固体放电管

Transient Suppressor Protection Device (TSPD)

型 号 (Part Number) : TSPD-SC Series

内 容 CONTENT

- 1、简介 Introduction
- 2、特点 Features
- 3、主要应用 Main applications
- 4、电参数 Electrical information
- 5、电特性 Electrical characters
- 6、典型电特性曲线 Typical electrical characters applications
- 7、热特性 Thermal Considerations
- 8、外观尺寸 Shape and Dimensions
- 9、其他 Other


版本Version	编写Compile	审核 Auditing	批准Authorize
V1.0	Teddy Lee	Jim Li	

一、简介 Introduction

Boarden TSPDs are designed to help protect sensitive telecommunication equipments from over voltage events as lightning strikes, power contact and power induction per as Telcordia GR-1089 and ITU-T K.20(K21). A TSPD appears as a very high impedance device under normal operating conditions, but will change its impedance to short to divert current to ground under over voltage events. TSPDs have a very high power energy absorb capability and very fast response time, which helps this product very suitable to be applied to Central Office Equipments (CO) and Customer Premise Equipments (CPE) in telecommunication field.

二、特点 Features

- High Power Capacity 100A (10/1000us voltage Waveform)
- Low Protection Voltage
- Low Leakage Current less than 2μA
- Bi-direction Protection Devices
- Response Time is < 1ns
- Solid-state silicon technology
- RoHS Compliant
- Meets MSL 1 Requirements




三、主要应用 Main applications

- Audio/Video Line
- RS-485
- Peripherals
- Networking and Telecom
- Serial and Parallel Ports

四、电参数 Electrical information (Tamb=25°C)


Parameter	Definition
C	Off-state Capacitance
I _{BO}	Switching Current
I _{DRM}	Leakage Current
I _H	Holding Current
I _{PP}	Peak Pulse Current
I _T	On-state Current
I _{TSM}	Peak One-cycle Surge Current
V _{BO}	Switching Voltage
V _{DRM}	Peak Off-state Voltage
V _T	On-state Voltage

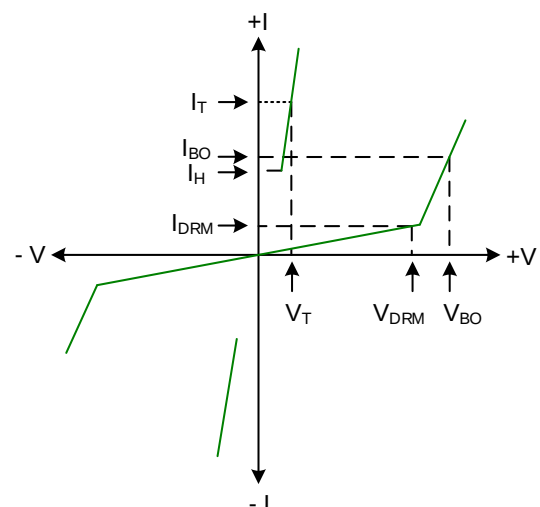


五、电特性 Electrical Characters

PART NUMBER	Maximum Standard-off Voltage	Maximum Leakage Current @V _{DRM}	Maximum Breakover Voltage	Maximum Breakover Current	On-state Voltage @1A	Maximum Capacitance @V _R = 0V, f = 1MHz	Minimum Holding Current
	V _{DRM} (V)	I _{DRM} (μA)	V _{BO} (V)	I _{BO} (mA)	V _T (V)	C Typ.(pF)	I _H (mA)
P0080SC	6	10	25	800	4	70	50
P0300SC	25	10	40	800	4	70	50
P0640SC	58	10	77	800	4	60	150
P0720SC	65	10	88	800	4	60	150
P0900SC	75	10	98	800	4	55	150
P1100SC	90	10	130	800	4	55	150
P1300SC	120	10	160	800	4	55	150
P1500SC	140	10	180	800	4	50	150
P1800SC	180	10	220	800	4	50	150
P2300SC	200	10	260	800	4	50	150
P2600SC	220	10	300	800	4	45	150
P2800SC	240	10	320	800	4	45	150
P3100SC	275	10	350	800	4	40	150
P3500SC	320	10	400	800	4	40	150
P4000SC	360	10	450	800	4	30	150
P4200SC	380	10	480	800	4	30	150


六、典型电特性曲线 Typical electrical characters applications

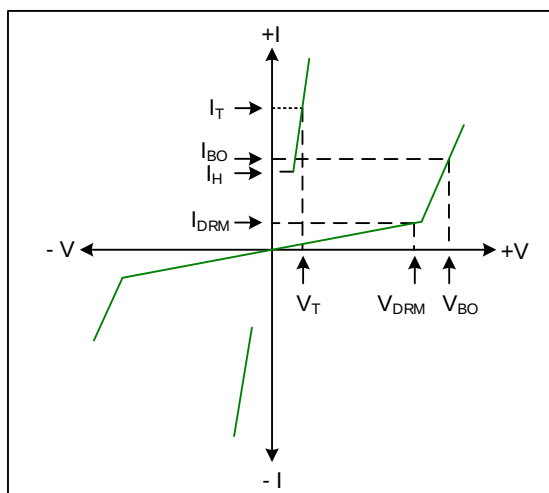


V - I Characteristics

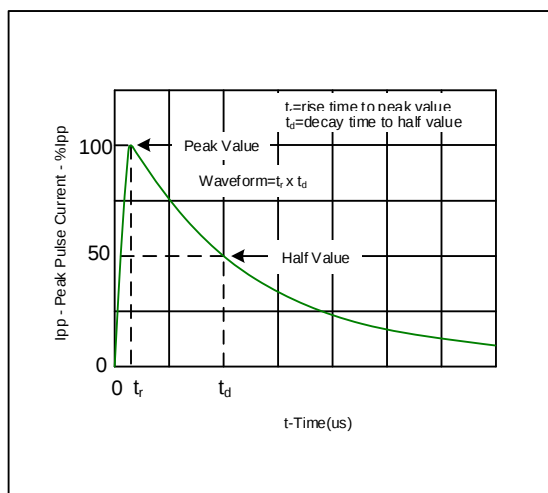

Tr x td Pulse Waveform

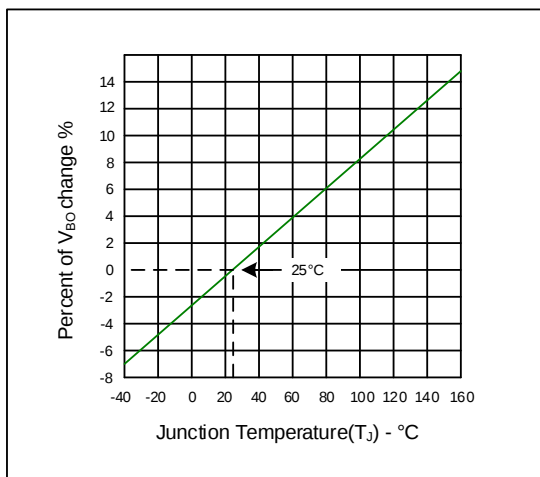

Normalized V_{BO} Change versus Junction Temperature

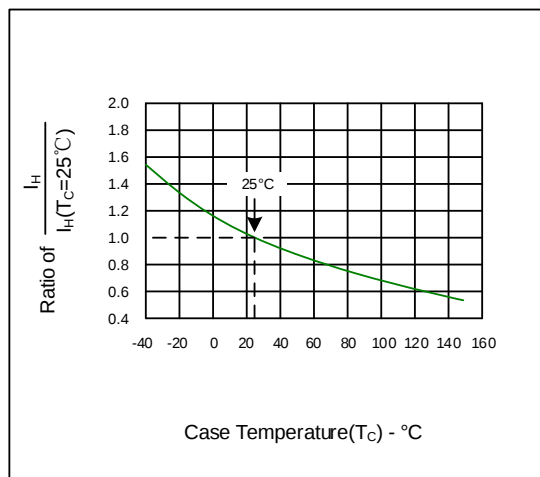


Normalized DC Holding current versus Case Temperature

七、热特性 Thermal Considerations

Symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature	-40 to +150	°C
T_S	Storage Temperature Range	-40 to +150	°C
$R_{\theta JA}$	Junction to Ambient on printed circuit	90	°C/W

八、外观尺寸 Shape and Dimensions

Ref. (mm)	Min.	Max.
A	2.13	2.45
A1	0.051	0.203
b	1.95	2.20
C	0.152	0.305
E	5.21	5.59
E1	4.06	4.57
D	3.30	3.94
L	0.76	1.52

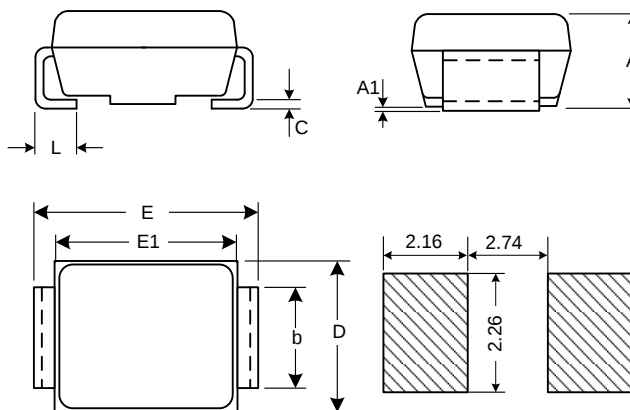

九、其他 Other

*. This specification is the property of Boarden Electronics Technology Co., Ltd and shall not be copied or used as commercial purposes without permission.

*. For additional information, please contact your local Sales Representative.